



# 2017 Owners Manual

Jewel  
Freedom  
Spirit  
Triumph  
Splendor  
Majestic  
Imperial  
Reign

# CONTENTS

<b>1.0 Coach Exterior</b> .....	<b>1</b>	Water Pump Switch .....	7
Fiberglass Skins .....	1	Monitor Panel .....	7
Chalking .....	1	TV/DVD .....	7
Fading .....	1	Interior Maintenance .....	7
Body Paint .....	1	<b>3.0 Electrical Systems</b> .....	<b>7</b>
Washing Your RV .....	1	12-Volt Automotive Electrical System .....	7
Waxes and Polishes .....	2	Emergency Start System .....	8
Repairs .....	2	12-Volt Auxiliary Coach System .....	8
Doors and Locks .....	2	Firefly 12-Volt DC Distribution Panel .....	8
Ladder and Rack .....	2	120-Volt AC System .....	8
Roof Mounted Storage Compartment .....	2	Power Inverter/Charger .....	9
Sewer Hose Compartment .....	2	Transfer Switch .....	9
Engine Fuel Door .....	3	110-Volt Utility Supply .....	9
Diesel Exhaust Fluid (DEF) Door .....	3	Motorcoach Battery Care .....	9
Power Cord .....	3	Battery Storage Compartment .....	9
Waterfill Access Compartment .....	3	Battery Disconnect .....	9
120-Volt Exterior Outlet .....	3	Ground Fault Circuit Breaker .....	10
Furnace Outlet .....	3	120-Volt Auxiliary Generator .....	10
Roof Mounted TV Antenna .....	3	<b>4.0 LP Gas Systems</b> .....	<b>11</b>
TV Antenna .....	3	LP Tank .....	11
Signal Amplifier .....	3	LP Gas Detector .....	11
Cable Connection .....	4	Furnace .....	12
Entrance Door Light and Grab Handle .....	4	Water Heater .....	12
Awning Light .....	4	Refrigerator .....	12
<b>2.0 Coach Interior</b> .....	<b>4</b>	Induction or LP Cooktop .....	13
Seat Belts .....	4	LP Gas Systems Maintenance .....	13
Smoke Detector .....	4	<b>5.0 Plumbing Systems</b> .....	<b>13</b>
Cabinets and Doors .....	4	Fresh Water System .....	13
Beds .....	4	Fresh Water Tank .....	14
Sofa Bed .....	4	City Water Connection .....	14
Dinette / Bed .....	4	Toilet .....	14
Double Trundle Sofa Bed .....	5	Drain Systems / Holding Tank Evacuation .....	14
Cabover Bed .....	5	Seasonal Protection .....	15
Rear Side Bed .....	5	Winterizing .....	15
Carbon Monoxide Detector .....	5	Summer De-Winterizing .....	16
Emergency Exits .....	5	Disinfection of Potable Water Systems .....	16
Roof Vents .....	5	<b>6.0 Tire Inflation, Towing, Tips</b> .....	<b>16</b>
Bathroom Fan .....	5	Vehicle Loading Tips .....	17
Living Room Fan .....	6	Trailer Towing .....	17
Roof Air Conditioner .....	6	Towing and Tips .....	17
Operating Instructions .....	6	Driving Tips .....	18
Cooling Operation .....	6	Operating Tips - Diesel Owners .....	18
Heating Operation .....	6	Routine Maintenance .....	19
Maintenance .....	6	Travel Tips .....	19
Troubleshooting .....	6	Pre-Trip Inspection .....	20
Microwave Range Hood Combination .....	7	<b>Attention Owner</b> .....	<b>20</b>
Water Pump Switch / Monitor Panel .....	7		

## **1.0 COACH EXTERIOR . . .**

### **Fiberglass Skins**

At Born Free Motorcoach, we constantly test and evaluate the latest in new fiberglass materials to offer you, the owner, the finest and the most long-lasting products available. Even though we are constantly striving to use the best possible products in the construction of your motorcoach, the fiberglass finish may become dull, faded, or chalky without proper care. The following is a brief explanation of what causes dull or faded fiberglass finish and what can be done to restore the finish.

Fiberglass consists of two basic polyester products – gel coat and the structural reinforcement. Gel coat is the outer colored surface, and the structural reinforcement is a blend of polyester laminating resin mixed with strands of glass to create a structure that is strong, weather resistant, and long-wearing.

Man made and natural materials, when placed in the elements, slowly deteriorate. The material is exposed to the sun, water, wind, dust, and chemicals in the air; the amount of wear and tear depends on how you treat the product and maintain it. An automobile's exterior surface quickly deteriorates if you do not wash and wax the painted surface. Although the gel coated surface is approximately ten times thicker than the paint surface on your automobile, it reacts similarly when exposed to the elements.

#### **Chalking**

Chalk is the outer surface of the gel coat breaking down into an extremely fine powder. The chalk that develops is strictly on the surface. This is caused by overexposure to the sun's ultraviolet rays, chemicals in the air, or improper care of the gel coat surface. To minimize this chalking, wash the unit and apply a sealant to restore the luster. If this is not effective, apply a fine rubbing compound, either by hand or with a power buffer. Follow this procedure with a good sealant. If this method is still ineffective, a light sanding using 600 grit (or finer) wet or dry sandpaper can be used followed by fine rubbing compound and a coat of sealant.

***NOTE: If a power buffer is used, use low RPM with light pressure. Keep the buffer moving at all times to prevent heat build-up, which may result in softening of the gel coat surface.***

#### **Fading**

Fading means that the color has changed. Fading is caused by (1) chalking, which makes the color light, (2) pigments in the gel coat that have actually changed color due to a chemical reaction with chemicals or pollution in the air, or (3) the gel coat being bleached or stained by something. Stains may derive from dirt, dust, road tar, plant sap, rust, or materials from caulking or sealing compounds.

To determine how to remove a stain, pre-test the stain in an inconspicuous area first, using mild detergent. A mild abrasive cleaner may be used if necessary. The abrasive cleaner may leave the finish dull and may need to be buffed to restore the luster. Always apply a coat of sealant to the repair area when completed.

To remove a non-soluble stain, you may try acetone, paint thinner, or alcohol, using care to prevent prolonged contact in order to minimize the risk of deterioration of the gel coat surface.

#### **Body Paint**

Some Born Free Motorcoaches have partial or full body paint on the fiberglass skins. The paint finish consists of a base coat, that provides the color, covered by clearcoat, which protects the base coat. It is the clearcoat that needs to be maintained especially in harsh environments. Clearcoats do not fade or lose gloss but may appear to do so when contaminated by the environment. Many products used for maintenance of fiberglass can also be used for painted surfaces. Touch-up paint and paint color information is provided with each coach when applicable.

#### **Washing your RV**

When possible wash and wax your unit in a shaded area to prevent rapid evaporation of water and soap that can result in water spotting. Use a separate sponge or wash mitt for fiberglass and painted surfaces and another for heavy dirt areas such as tires, wheel wells and undercarriage components. Dirty sponges and mitts can be abrasive to

fiberglass and painted surfaces. Brushes and mitts that are made of plastic bristles can be used for tires and wheel wells but should not be used on fiberglass or paint. Wash heavy dirt areas first and then work from the top down. Use a mild soap or detergent. Avoid using cleaners that contain harsh abrasives and try to avoid using combination wash-n-wax products. Ammonia-based glass cleaners can be used on stains or road tar but need to be followed immediately with warm soapy water and a clean water rinse. Drying your unit with damp natural or synthetic chamois, or other drying products can also eliminate water spots and stains that can occur from chemicals found in many tap-water and well water systems.

### **Waxes and Polishes**

Waxes (particularly carnauba waxes) have been a long standing favorite fiberglass protection method. Recently, however, the chemical industry has developed better products for sealing gel coated and painted fiberglass surfaces. These new polymer based products aren't just a coating that resides on the surface like waxes, they actually get into the pores of the gel coat or clearcoat and seal the surface from oxidation and other damaging elements. Polymer based sealers can be used to provide excellent protection for both fiberglass and painted surfaces.

There are many polymer based sealers available to protect your unit. When choosing a sealer, carefully read the label of the product to make sure it contains polymers that are designed to be used on gel coats or fiberglass, and painted surfaces, and determine how frequently the sealer should be applied. For coaches that have had waxes previously applied, wax removers are available for use before applying the sealant.

### **Repairs**

Scratches, chips, cracking, etc. on painted surfaces may be touched up using the touch-up paint provided with your unit. The paint formulation information provided with your unit can be used for larger repairs or your unit can be taken to a body repair shop to have the color matched. For large fiberglass gel coat repairs (non-painted surfaces), you may contact Born Free Customer Support and we will send you the desired amount of gel coat

material.

### **Doors and Locks**

Born Free Motorcoaches are equipped with the following locks and keys:

- (1) Chassis door and ignition.
- (2) Coach entrance door lock.
- (3) Coach entrance dead bolt lock.
- (4) Compartment door locks (Barrel keys).
- (5) Under floor compartment doors (WHB key)

For a replacement, see chassis dealer, call the door lock provider (for entrance door replacement keys), or call Born Free Motorcoach (for replacement barrel keys).

### **Ladder and Rack (Some Models)**

An exterior, rear mounted ladder provides access to the roof area for storage purposes and routine maintenance. Care should be taken when using the ladder at all times.

Motorcoaches with rear wall mounted spare tires feature a ladder that folds up to provide access to the spare (Figure 1.1). Do not drive with the ladder in the up position - always have the ladder in the down position and the legs securely inserted into the rubber feet while driving.



Figure 1.1

Do not exceed 100 pounds per square foot or 1,000 pounds total weight of storage on the roof.

### **Roof Mounted Storage Compartment (Optional On Models With Ladders)**

A weatherproof storage pod is a very useful accessory for storing large items such as suitcases and sleeping bags. Do not exceed 10 pounds per square foot or 100 pounds total weight of storage in the compartment.



Figure 1.2

### **Sewer Hose Storage**

Storage for your sewer hose (Figure 1.2) is

located on the driver side, in a tube inside the access door for the generator and battery tray. On some models, the sewer hose storage is located under the rear bumper.

### Engine Fuel Door

To access your fuel tank fill, open the fuel door (Figure 1.3) located on the driver's side of the coach. Pay particular attention to the warning labels affixed to the door. Diesel owners—remember to use diesel fuel rather than gasoline.



Figure 1.3

**WARNING:** For your safety, all gas appliances must be turned off when refueling the vehicle.

### Diesel Exhaust Fluid (DEF) Door

Models with a diesel engine all have a diesel exhaust fluid (def) fill (Figure 1.4). This fill is topped with a blue cap, and is behind a door that is the same size and shape as the engine fuel door(s) and located on the passenger side of the motorcoach.



Figure 1.4

### Power Cord

A 30-foot power cord is included with each unit.

### Water Fill Access Compartment

An access door, located on the driver's side, approximately two thirds back (Figure 1.5), contains hookups for the: (A) Potable Water, (B) City Water Fill, (C) Outside Shower, (D) Outside Cable Connection, (E) Exterior Light. The light is a useful aid while evacuating waste tanks at night.



Figure 1.5

### 120-Volt Exterior Outlet

A 120-volt weatherproof outlet, located on the passenger's side of the motorcoach, (Figure 1.6) is available to operate 120-volt accessories. This outlet is controlled by a 120-volt ground fault-breaker (located in the converter) to prevent electrical shock caused by wet conditions. Use only grounded plugs and do not exceed the amperage limit of the breaker.



Figure 1.6

### Furnace Outlet

The exterior furnace outlet (Figure 1.7) is a combination intake / exhaust system. When the furnace is operating, this vent may become hot.



Figure 1.7

**WARNING:** Do not touch or place combustible materials near the furnace outlet.

### Roof Mounted TV Antenna

#### A. TV Antenna

All coaches have an antenna (Figure 1.8) mounted on the roof. For proper antenna use refer to the operating instructions found with the product literature in your coach.



Figure 1.8

#### B. Signal Amplifier

All coaches are also equipped with signal amplifiers. Amplifier wall plates (Figure 1.9) are usually located in the forward-most compartment of the passenger's side overhead cabinet. To activate the signal



Figure 1.9

amplifier and improve your TV antenna reception, push the button on the amplifier wall plate. A green light indicates amplified antenna reception. Because the amplifier will interfere with cable and satellite signals, the button should be in the off position when receiving a signal from a cable hookup or from a satellite.

### C. Cable Connection

Some campgrounds offer cable TV. To use this service, simply connect a TV coaxial cable from the connection point provided by the campground to the connection point found inside the Water Fill Access door (Figure 1.5 (D)) of the motorcoach.

*Note: When cable TV is in use, Signal Amplifier Button (Figure 1.9) must be in the off position to reduce interference with cable reception.*

### Grab Handle and Stepwell Lights

The lighted grab handle and stepwell light are controlled by switches located inside the entry door on the wall.

### Awning light

The awning light is a strip of led lights located under awning trim. The awning light is remote controlled with a dimmer. The remote will be located on your key ring.

## 2.0 COACH INTERIOR . . .

### Seat Belts

For seat belt requirements, refer to FMVSS (Federal Motor Vehicle Safety Standards). Most states, by law, require the use of seat belts. Born Free Motorcoach recommends all passengers use seat belts while the vehicle is in motion. (The motorcoach has seat belts on its chairs only — sofas and dinettes do not have seat belts attached.)

According to Federal Regulations for recreational vehicles, an automatic restraint diagonal shoulder belt on the right front passenger seat is not approved (and therefore cannot be used) to secure a child safety seat.

### Smoke Detector

A smoke detector (Figure 2.1) has been provided

for your protection. The detector operates on a 9-volt battery. You should test the detector before each trip, and weekly while your motorcoach is in use. Refer to the Smoke and Fire Users Guide for operating instructions, proper testing procedures, and the recommended frequency for battery and detector replacement.



Figure 2.1

***LIMITATION ON LIABILITY – Warranty on the smoke detector is limited to the manufacturer’s warranty. Born Free Motorcoach is not liable for any loss or damage which may occur, either directly or indirectly, due to the failure of the detector.***

***Some states do not allow the exclusion or limitation of incidental or consequential damages; the above limitations or exclusions may not apply to you. The warranty provides you with specific legal rights; you may also have other rights, which will vary from state to state.***

### Cabinets and Doors

The cabinets in a Born Free Motorcoach are crafted from oak, alder, cherry, hickory, or walnut. Normal movement of the motorcoach and/or loading/unloading the cabinets may cause their doors to become misaligned. A simple adjustment of the door striker or hinge is all that is normally required.

### Beds

Born Free Motorcoach offers several types of beds, depending on the floor plan selected. These beds are designed for maximum comfort in both seating and sleeping.

1. **50” x 76” Sofa Bed** – The sofa quickly converts to a 50” x 76” bed. Remove both arm rests then simply lift up the front edge of the seat cushion and pull out. To convert the bed back to a sofa, lift the front edge and push in and then replace the arm rests.
2. **Dinette / Bed** – The optional dinette/bed combines sleeping accommodations with dinette

style seating. To prepare the bed, first remove the table and support leg. To convert the seats to a bed, lift up the front edge of each cushion and pull out. Storage is located under each seat base.

3. **Double Trundle Sofa Bed**— This sofa has the ability to recline one or both sides independently. To prepare the bed you must pull up the trundles (foot rests) by pulling on the loop straps located on top of each trundle. Once the trundles are out you can recline in any position you like, from slightly inclined to completely flat using the recline buttons in the arm rests of the sofa. To convert back to a sofa, push the button and bring the sofa back to its upright position and reinsert trundles. **DO NOT** run recliner without first removing trundles first.
4. **Cabover Bed** – This uniquely shaped, dual layer memory foam mattress fits the contour of the cabover bed area. By “flipping down” the center cushion, you are ready to climb the bed ladder to the cabover bedroom. Privacy curtains separate this area from the rest of the motorcoach and the outside. At its widest points, the mattress measures 66” x 82” x 4” thick.
5. **Rear Side Bed** – The mattress in a rear side bed floorplan features a 49” x 75” Back Care inner spring mattress. This model also features under-bed storage. To gain access to this space, open the door at the base of the bed, the outside compartment door, or lift the mattress and remove the access panel.

### Carbon Monoxide Detector

The C/O Detector (Figure 2.2) is designed to detect high levels of carbon monoxide in your motorcoach. The alarm operates on a 9-Volt battery. For your protection, we recommend you test the alarm before each trip and weekly while your motorcoach is in use. Refer to the C/O Detector Owners Manual for operating instructions, proper testing procedures, and the recommended frequency for battery and detector replacement.



Figure 2.2

***LIMITATION ON LIABILITY – Warranty on the carbon monoxide detector is limited to the manufacturer’s warranty. Born Free Motorcoach is not liable for any loss or damage which may occur, either directly or indirectly, due to the failure of the detector.***

***Some states do not allow the exclusion or limitation of incidental or consequential damages; the above limitations or exclusions may not apply to you. The warranty provides you with specific legal rights; you may also have other rights, which will vary from state to state.***

### Emergency Exits

The two cab (chassis) doors and the motorcoach’s entrance door are designated emergency exits. Additionally, the rear window of some motorcoaches has also been designated as an emergency exit. If a window has been designated as an emergency exit, it will have a red latch. All occupants should be familiar with these exits in case of an emergency.

### Roof Vents

To provide adequate ventilation inside your motorcoach, roof vents have been installed in the ceiling.

#### A. Bathroom Fan

All floorplans have a fan to ventilate the bathroom area (Figure 2.3). To operate the fan, push the handle up to open the cover. Turn the fan on and off by pressing the red button. The cover must be open before the fan is turned on, and the fan must be turned off before the handle is pulled down to close the vent. The cover should be in the closed position when not in use. Some models use a fantastic fan similar to the living room fan (Figure 2.4). In the bathroom,



Figure 2.3



Figure 2.4

these fans are unidirectional and only vent to the outside. Refer to the Fan-Tastic Fan operating instructions for proper use. Do not travel with the roof vent in the wide-open position and make sure all roof vents are closed to ensure maximum efficiency when using the air conditioner.

### B. Living Room Fan-Tastic Fan

A living room Fan-Tastic Fan (Figure 2.4) is located in the roof area near the front of the unit. This fan is operated using a remote (Figure 2.5) mounted on a wall and is also equipped with a rain sensor. Refer to the Fan-Tastic Fan operating instructions for proper use. Do not travel with the roof vent in the wide-open position and make sure all roof vents are closed to ensure maximum efficiency when using the air conditioner.



Figure 2.5

### Roof Air Conditioner

Every Born Free Motorcoach is equipped with a ducted 15,000 BTU Coleman roof mounted air conditioner. It features several cooling settings and features a heat strip that can be used to take the chill out of the air on cool mornings. The air conditioner is controlled by a remote thermostat mounted on the wall (Figure 2.6) that controls temperature for A/C, heat strip, gas heat, and fan speeds. Refer to the Comfort Control Users Guide for instructions on how to get the most from your thermostat.



Figure 2.6

- **Operating Instructions** – The roof mounted air conditioner operates on 120-volt power supplied by either the shoreline or generator. The AC / Heat Strip must be in the OFF position when the generator is started or when the shoreline power cord is plugged in.
- **Cooling Operation** – Select the fan speed to best satisfy your needs:
  - **High Cool** – Select when maximum

cooling and dehumidification is required.

- **Medium Cool** – Select when normal or average cooling is required.
- **Low Cool** – Select to maintain comfort — typically used when the room is already at the desired comfort level. This speed is normally used for nighttime operation.

**NOTE:** *When in the cool mode, (unless the fan is set to “auto”) the blower will run continuously to circulate air. In order to maintain the selected temperature level, the compressor will cycle on as cooling is required. If the fan is set to “auto” the fan and the compressor will cycle ON and OFF as determined by the difference between actual temperature and the desired temperature.*

**WARNING:** *Do not run the air conditioner with all vents closed. This creates back pressure on the air conditioner, impedes its operation, and can cause damage over time.*

**NOTE:** *“Filters” have been placed in the rear ducts. Their purpose is limit airflow to the rear ducts and redirect more airflow to the front of the motorcoach. These are not used for air filtration and can be removed if desired.*

- **Heating Operation** – Select Heat on the thermostat. The fan and heater will run as required. The heat strip takes a few minutes to warm up, but, if left on, does an adequate job of heating when small amounts of heat are required in the motorcoach. The heat strip should not be used as the main source of heat for your motorcoach – the furnace should be used in colder conditions. Do not leave the heat strip on when the vehicle is unattended.
- **Maintenance** – Periodically remove the filters located in the inside air box and clean them. After the filters are removed, wash the filter/grille assemblies with soap and warm water. Let the assemblies dry before reinstalling them.
- **Trouble Shooting** – If the unit fails to operate, first check the power source (the shoreline power cord or the generator) to ensure it is generating a proper amount of current. Next, check the breaker in the power converter to see

if it has been tripped. Refer to the Air Conditioner manual for warranty and service information.

### Microwave Range Hood Combination

The microwave has a built in hood fan that vents to the outside (Figure 2.8). The range hood may be cleaned with soap and water. The aluminum filter should be periodically removed and washed in soap and water, allowed to dry, and then reinstalled. Reset the filter status after replacing and/or cleaning filters. Refer to the Microwave Oven Care section of the owners manual in this packet for proper operating instructions and warranty service information



Figure 2.8

### Water Pump Switch / Monitor Panel

- **Water Pump Switch** – The water pump switch (located on the monitor panel) (Figure 2.9) will activate the water pump. The pump may be left on while camping; it will automatically cycle when water is needed. Born Free Motorcoach recommends turning the water pump switch off when traveling or when leaving the motorcoach. In the event of a leak in the water system, turning the pump switch off may reduce damage to the motorcoach.
- **Monitor Panel** – Pressing the individual buttons on the monitor panel (Figure 2.9) will identify the level of that item. The panel can be used to monitor levels of the black waste holding tank, the gray water holding tank, the fresh water holding tank, the LP tank, and the charge condition of the auxiliary battery.



Figure 2.9

### TV/DVD

Born Free installs several brands of premium LED

HD TV's; consult the manufacturer's owner's manual in this packet for proper operating instructions and warranty service information.

### Interior Maintenance

Carpet, upholstery, curtains, and shades should be vacuumed regularly. If the curtains need to be cleaned, they should be dry cleaned. Carpet spot remover may be used to remove stains and soiled spots from furniture and carpet. Always read and follow the instructions of any cleaning product.

## 3.0 ELECTRICAL SYSTEMS . . .

### 12-Volt Automotive Electrical System

The chassis batteries provide power to the following:

- (1) Headlamps
- (2) Turn Indicators
- (3) Console Panel Lamps
- (4) Windshield Wipers
- (5) Speed Control
- (6) Starter Motor
- (7) Backup Lights
- (8) Exterior Clearance Lights
- (9) Tail Lights, Indicator Lights, and Stop Lights
- (10) Cigarette Lighter (Dash Mount)
- (11) Auto Air Conditioner
- (12) Dash Radio/CD/Navigation
- (13) Lumbar—Driver and Passenger
- (14) Driver Chair Controls
- (15) Heated Seats (optional)

The above accessories are fused at the chassis fuse box or auxiliary fuse block. Refer to your chassis owner's manual for the locations of the batteries and fuse boxes and for proper fuse replacement.

**NEVER** install a larger rated fuse as a replacement; severe wire damage or possible fire may result. For some models an additional fuse block (Figure 3.1) has been added for the side mirrors, driver seat and passenger seat lumbar, and compass mirror. It is located under the dash by the brake pedal.



Figure 3.1

**Note:** The chassis batteries are sealed and do not

*require maintenance.*

## Emergency Start System

An emergency start switch has been installed that allows use of the coach batteries for starting the engine when the chassis battery is dead. To use this feature, press the switch (Figure 3.2) at the same time the ignition key is turned to start the engine. Release the switch when the engine starts.



Figure 3.2

## 12-Volt Auxiliary Coach System

Each Born Free Motorcoach is equipped with two, deep-cycle, auxiliary batteries. These batteries are beneath the coach floor, near the generator on the driver side, or behind the passenger side running board.

The auxiliary batteries operate the following:

- (1) Interior Lights
- (2) Interior Roof Fans
- (3) Furnace Fan and Igniter
- (4) Water Pump
- (5) Monitor Panel
- (6) Auxiliary Generator Starter
- (7) LP Leak Detector
- (8) Igniters for Refrigerator and Water Heater
- (9) TV / DVD
- (10) Isolator Relay
- (11) Electric Day/Night Shades
- (12) Interior Outlets
- (13) Induction Cooktop
- (14) Hydraulic Leveling Jacks (optional)
- (15) Slide Room (optional)

An isolator relay (Figure 3.3) separates the chassis' electrical system from the motorcoach's electrical system, which allows the motorcoach's auxiliary system to be used without affecting the charge of the chassis battery. When the chassis engine is running, the isolator relay allows the alternator to charge both the chassis battery and the auxiliary battery. When the motorcoach is plugged



Figure 3.3

in to 120-volt shoreline power, or, when the auxiliary generator is running, a small charge is generated through the power converter to the auxiliary batteries. The rate of this charge, however, is a great deal less and will take longer to recharge.

*Note: The power inverter does not charge the chassis battery when the motorcoach is plugged in to the 120-volt shoreline power cord or when the auxiliary generator is in use.*

## Firefly 12-volt DC Distribution Panel

12-volt fuses are located inside the electrical compartment on a DC distribution panel (Figure 3.4) that provides a unique and compact solution that facilitates the centralized control of DC loads. This enclosure system forms a display with access to all status LED'S and over-current protection features that are built into each module. In the event a fuse blows, simply push the white button to reset the fuse.



Figure 3.4

## 120-Volt AC System

Operated from a shoreline utility service, or an auxiliary generator source, the following equipment runs only off 120-volt power:

- (1) Roof Air Conditioner / Heat Strip
- (2) Refrigerator (except when operating on LP Gas)
- (3) Microwave
- (4) Charger within the Outback inverter

120-volt circuit breakers are located inside the breaker distribution panel in the electrical cabinet (Figure 3.5). The circuit breakers controlling the 120-volt power are a manual reset type, similar to those used in your home. If a short occurs, the breaker will trip and will need to be



Figure 3.5

manually reset. The circuits are identified inside the breaker distribution panel. In the event a circuit breaker trips, reset the breaker. NEVER replace a circuit breaker with a larger breaker.

### Power Inverter/Charger

A 2000 Watt power inverter/charger is installed in each Born Free Motorcoach. It provides true sine wave power output, battery charging capability, and battery voltage over and under protection. It incorporates a DC to AC inverter, battery charger, and an AC transfer switch which combines 30 amp pass through and neutral/ground switching.

For models with an “Outback” Inverter/Charger, the control panel is located near the entrance door. To disconnect the inverter from the batteries use the inverter battery disconnect (Figure 3.6) located between the



Figure 3.6

generator and the batteries. For Models with a “Xantrex” Inverter/Charger a power button on the inverter control panel will disconnect the inverter from the batteries.

Note: The inverter monitor constantly draws a small amount of power. If you will not be providing power to the coach (by driving, plugging in, or running the generator) for three days or more, disconnect the inverter from the batteries.

### Transfer Switch

Born Free Motorcoaches are equipped with a standalone transfer switch. AC power enters a transfer switch sending it to the AC distribution panel, there is an inverter input circuit breaker in the AC distribution panel that sends power to the inverter charger. From inverter charger it goes back to AC distribution panel/ which will run select circuits only.

### 110-Volt Utility Supply

Born Free Motorcoaches are equipped with a Smart Plug 30-foot, UL approved, 30-amp, heavy-duty cable (Figure 3.7) is provided for connection to a utility supply; a 15-amp adapter is provided to adapt to a standard three-prong outlet.

**NOTE:** When using a 15-amp adapter, operating the air conditioner and too many other appliances may cause a circuit overload. Never use an ungrounded plug adapter; an electrical short may occur and cause serious electrical damage or personal injury. If the motorcoach is connected to a utility supply for long periods of time, it is important to check the water level of the batteries every week; add water if necessary.



Figure 3.7

### Motorcoach Battery Care

Check the battery water level before every trip and at least once a week during heavy use. The terminals on the battery must be kept clean and free from corrosion. Even when the motorcoach is idle, the batteries will discharge due to chemical action. Periodically drive the motorcoach, run the generator, or plug the motorcoach in using the shoreline power cord in order to replenish some of the lost battery charge. Do not connect the battery to a portable battery charger and leave it for the winter; overcharging may occur and it may result in the batteries overheating and creating a fire hazard.

### Battery Storage Compartment

Each motorcoach is manufactured with an auxiliary battery storage compartment (Figure 3.8), located under the floor on the driver’s side near the generator or behind the passenger side running board. This compartment is not weather-tight – fumes and gasses must be allowed to escape.



Figure 3.8

### Battery Disconnect

If the motorcoach is stored for the winter, turn the battery disconnect switch (Figure 3.9) to the “off”

position. The battery disconnect switch is located near the entrance stepwell.

## Ground Fault Circuit Breaker

For your protection and safety, we have installed a Ground Fault Circuit Breaker (GFCB) (Figure 3.10) in the converter to protect the outlets in your Born Free Motorcoach. The outlets requiring protection are those located in areas with potential exposure to moisture. All 110-volt outlets are protected by this device and will trip the “GFCB” breaker if moisture is sensed. You should test the “GFCB” once a

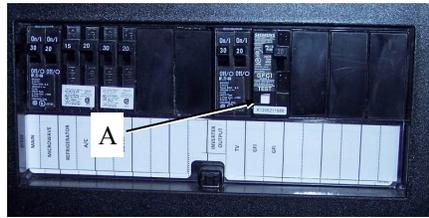


Figure 3.10

month to ensure the breaker is functioning properly. To test the device, simply push the “TEST” button (A). The breaker handle will audibly move to the center trip position, indicating ground fault protection. Reset the breaker by moving the handle to “OFF” and then to “ON”. If the test fails to trip the breaker, the breaker should be replaced.

## 120-Volt Auxiliary Generator

The auxiliary generator (Figure 3.11), located under the floor on the driver’s side of the vehicle, allows you to use 120-volt appliances when 110-volt shoreline power is unavailable. Gas generators operate on unleaded gasoline drawn directly from the fuel tank of the motorcoach; diesel



Figure 3.11

generators operate on diesel fuel drawn directly from the fuel tank of the motorcoach; LP generators operate on LP gas from the motorcoach’s LP storage tank. In order for a gas generator to operate, the fuel tank must be at least one-fourth full; the level of the LP tank must be at least 15% full.

Motorcoaches equipped with a gas or diesel

generator come equipped with a generator fuel shutoff valve (Figure 3.12). This is located in front of the generator and can be found underneath the coach in the area where the cab meets the body. When preparing the motorcoach for storage, turn the valve from “open” to “shut” and run the generator until it dies. This will remove all fuel from the generator and its fuel lines.



Figure 3.12

**WARNING:** *The exhaust from a gas generator contains carbon monoxide (CO). This gas is colorless, odorless, tasteless, lighter than air, and poisonous. The exhaust system of your auxiliary generator has been installed with your safety in mind, however, certain precautions must be taken to protect you from conditions beyond the control of the manufacturer.*

- Do not simultaneously operate your generator and a roof vent set on intake. Doing so could draw air containing exhaust gases into the vehicle.
- Do not open windows or non-powered vents in the vicinity of the generator location.
- When parking your motorcoach, position it so the wind will carry exhaust fumes away from the motorcoach. You should also note the position of other vehicles parked near you.
- Do not position the motorcoach in such a way that the generator exhaust will be deflected off vegetation, snow, buildings, vehicles, or any other object. Doing so may deflect the exhaust under or into the vehicle.

The auxiliary generator can be started by a switch on the generator or by a Remote Mounted Start/Stop Panel (Figure 3.13) located inside the coach’s electrical cabinet. Refer to the Owner’s Manual and Installation Instructions and Remote Mounted Start/



Figure 3.13

Stop Panel With Fuel Prime and Hourmeter for operation, maintenance, troubleshooting, and service and warranty information.

## 4.0 L P GAS SYTEMS . . .

### L P Tank

Your motorcoach uses liquid petroleum gas (LP / Propane) as a fuel for the appliances requiring heat (eg, water heater, furnace, range, and absorption-type refrigerator). LP gas is economical and effective for these purposes; when proper precautions are taken, it is a safe form of energy. The LP tank (Figure 4.1) is located under the floor on the passenger side of the motorcoach. Dependent on your model, it may be located at the front, or, it may be toward the rear. Refer to the brochure included in this packet for basic information and safety practices.



Figure 4.1

**WARNING:** For your safety, all gas appliances must be turned off when refueling the vehicle.

### L P Gas Detector

A standard feature in all Born Free Motorcoaches is the LP Gas Detector (Figure 4.2). It is designed to detect leakage in any LP gas piping and appliance system — not to prevent leaks. When power is first applied, a yellow light will flash for 3 minutes while the detector is stabilizing. Caution: The detector cannot alarm during the 3 minute warm-up cycle. At the end of the stabilizing period the LED will turn green indicating full operation. If an abnormal amount of LP is detected in your coach, a red light will come on and you will hear an alarm. Should the alarm sound, refer to the Operating Instructions for ‘Propane and Methane Gas Detector’ for the correct course of action. The LED

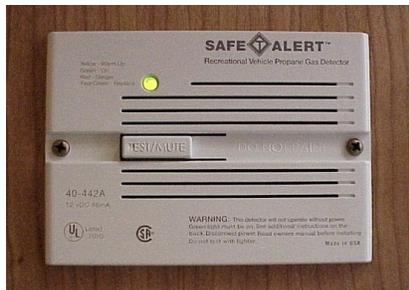


Figure 4.2

will alternately flash red and green when a malfunction is detected. If this occurs remove the detector immediately and return it for repair or replacement. If the detector does not seem to be properly operating, it should be examined by an RV dealer or the manufacturer should be contacted. The detector will not operate normally at voltages lower than 7V DC. The detector should be tested after the vehicle has been in storage, before each trip, and at least once a week during use. Refer to the manual for test procedures.

**LIMITATION ON LIABILITY – Warranty on the LP detector is limited to the manufacturer’s warranty. Born Free Motorcoach is not liable for any loss or damage which may occur, either directly or indirectly, due to the failure of the detector.**

**Some states do not allow the exclusion or limitation of incidental or consequential damages; the above limitations or exclusions may not apply to you. The warranty provides you with specific legal rights; you may also have other rights, which will vary from state to state.**

The LP Gas system should also be periodically checked for leaks. LP gas is mixed with an oily substance having a pungent odor; if there is a leak, this distinct odor will be present in the air.

The best method to test for leaks is to use a soap solution made with water and ordinary dishwashing detergent. Apply the solution with a small paintbrush (or a sponge) to the gas lines and connections. Bubbles will appear if gas is leaking out of the system. Most leaks occur at fittings and can usually be corrected by tightening the fitting. Where tightening fails to stop the leak, the fitting must be replaced.

**WARNING: Flammable materials should never be used to check for leaks in an LP Gas system.**

Occasionally, water may find its way into the LP Gas system. If this water subsequently freezes, operation of the system may fail. Adding anhydrous methanol to the LP gas system will usually eliminate this problem. The anhydrous methanol will absorb the water and carry it out of

the system as the gas is used. If possible, find a service station that adds methanol to their propane during the winter months.

**Note:** *Adding anhydrous methanol to your LP tank should only be performed by a certified technician.*

Most of the gas appliances in the Born Free Motorcoach have electric pilot lights, which lights the fuel upon demand. In addition, these appliances have a device built in to shut off the flow of gas to the burner if the burner does not ignite.

## Furnace

The furnace in the Born Free Motorcoach is an LP gas burning model and is controlled by a wall thermostat (Figure 4.3). Refer to the product manual for proper maintenance and operation. The furnace should not be used when the vehicle is in motion.



Figure 4.3

**Warning:** *Do not alter the vent assembly supplied with the furnace; modifications could affect its operation.*

## Water Heater

Your model may be equipped with a tankless on-demand water heater or a (6) gallon water heater.

A tankless on-demand water heater heats water while it is being used and doesn't require a water storage tank. The tankless water heater applies an equal amount of heat to the water flowing through the system. Therefore, the output temperature of the water depends on the temperature of the water going into the heater, and the amount of water flow going through the heater. Operation of the tankless water heater is like using a tank water heater. Turn the hot water valve on and add cold with it to achieve the desired temperature. The Control Panel (Figure 4.4) is located near the water heater. The heater



Figure 4.4

temperature can be adjusted with the Up and Down buttons. Refer to the Operating Instructions in your product literature for correct use and operation of your tankless water heater.

A (6) gallon water heater uses either 110V power, or LP Gas and 12V power to heat the water.

**WARNING:** *To prevent damage to the water heater ensure that there is water in the heater. The heating system will activate even when there is not water in the heater. Failure to fill the water heater before activating the heating system can result in damage to the heating element.*

To fill the water heater with water, turn the water pump switch on and open a hot water faucet. The water pump will push water into the water heater tank, and air from the water heater will escape through the open hot water faucet. A steady flow of water from the open hot water faucet will indicate the tank is full and the faucet may be shut off. The best time to fill the water heater is when you are filling the fresh water tank. The switches for the water heater are located with the other electrical panels above the entrance door. Activate the water heater with the "Electric" switch for shoreline or generator power and the "Gas" switch for LP gas. The red indicator light will remain lit when electric power is used and will only remain lit until the burner ignites for gas. For both Electric and Gas, the internal non-adjustable thermostat will cause the water heater to cycle on and off to maintain the proper temperature. Refer to the Operating Instructions in your product literature for correct use and operation of your (6) gallon water heater.

## Refrigerator

Born Free Motorcoaches are equipped with an LP Gas and 120-volt AC refrigerator. The refrigerator should be started at least one day before leaving on any trip or outing. Pre-chill all food and beverages in your home's refrigerator before placing them in your motorcoach's refrigerator. This will allow the refrigerator to cool in a more efficient manner and will not raise the temperature by suddenly placing too great a load on it. An inexpensive refrigerator thermometer can be purchased and will prove valuable in monitoring the refrigerator's temperature.

Both the motorcoach and the refrigerator must be level in order for the refrigerator to properly operate. Refer to the Refrigerator Installation and Operating Instructions for proper operation, maintenance, warranty, and service.

### Induction or LP Cooktop

To operate the induction cooktop, place an induction pan on the cooktop and turn the unit on using the touch controls and adjust temperature, cook time, etc. The induction cooktop runs on 110volt power and is not connected to the inverter. Use of the cooktop requires shoreline power or power from the generator. Refer to the owner's manual for complete operation instructions.

To use the LP cooktop, turn on the LP Gas at the tank. Once the gas at the tank has been turned on, simply turn on the gas control to the desired burner and light the burner with the built in igniter.

If you are using an LP gas range for the first time, you will notice the flame's height is appreciably lower than that of a natural gas burner. LP gas contains more BTUs per unit than natural gas; a lower flame cooks just as quickly and contains just as much heat as the larger, natural gas flame.

The LP gas flame in your Born Free Motorcoach should always be blue in color — no yellow tips. Yellow tips will smoke and/or cover the bottoms of your cookware with soot. Refer to your range manual for proper operation, maintenance, and warranty and service information.

***WARNING: The range is not a substitute for your furnace and must never be used to heat the motorcoach.***

### LP Gas Systems Maintenance

LP gas systems normally operate for long periods of time with minimum maintenance. However, a few tips on maintenance may be helpful. One of the worst enemies of LP gas systems is the spider. Spiders are attracted to tunnels and holes and frequently spin webs across and through the orifices of gas fed appliances. The webs restrict airflow and produce a weak, yellow flame which typically

deposits carbon. If a yellow flame is present, all parts of the burner should be wiped clean and the orifices should be blown clear with compressed air. If spider webs are not present and the flame is still too yellow, the air adjustment of the burner needs to be altered (until the flame is only blue in color). Refer to the affected appliance's operating instructions for more information, or, have a qualified technician make the appropriate adjustments.

## 5.0 PLUMBING SYSTEMS . . .

### Fresh Water System

Fresh water can be supplied to the motorcoach from two sources, (1) the water tank located inside the motorcoach or, (2) through a garden hose connected to the water



Figure 5.1

intake at one end and to a campground water source at the other end. The fresh water tank system is equipped with a demand pump (Figure 5.1) which controls water pressure by use of a switch built into the pump. When a faucet is opened (turned on), pressure in the water lines drop and the pump turns on. When the faucet is closed, pressure quickly builds up, and the pressure switch shuts the pump off. The manual switch, located on the monitor panel, is used to turn the electrical power to the demand pump off. The pump operates on 12-volt power.

***NOTE: It is good practice to turn the pump switch off when leaving the coach for a period of time and when retiring for the night. This will reduce damage to the motorcoach in the event of the development of a leak in the water system. If the pump cycles on and off and water isn't being used in the motorcoach,***



Figure 5.2

*shut the pump off and check the system for leaks.*

## Fresh Water Tank

The fresh water tank fill (Figure 5.2) is located outside the motorcoach on the driver's side, behind the water fill access compartment door (Figure 1.4 (A)). A garden hose can be used to fill the fresh water tank. Allowing the water to run into the tank at a moderately slow speed will allow air to escape and the tank will fill much more easily. Never leave the coach unattended while filling the water tank. Overfilling of the tank can cause it to bulge, which, in some instances, can cause cabinet damage. Remove the hose as soon as the tank is full.

## City Water Connection

A City Water Connection (Figure 5.3) has been provided on the outside of the motorcoach (refer to the Waterfill Access Compartment—Figure 1.4 (B)). This connection is to be used when the motorcoach is parked in a campground that has hookup facilities for “city water”. To use, turn off the demand pump and connect a water hose to this fitting. The city water pressure will provide adequate water flow. The city water connection will bypass the fresh water system and will not fill the fresh water tank. Some water systems have very high water pressure; to guard against damage to pressure-limiting components, it would be wise to use a standard pressure reducer in your hose line.



Figure 5.3

## Toilet

To flush the toilet, press the pedal down completely. To add water to the bowl, press the pedal to a horizontal position. Release when sufficient water is in the bowl. On some models, an optional hand sprayer is included. To use, simply press the sprayer thumb lever while stepping on the flush pedal. Other models have a hand flush rather than a foot flush. To operate a hand flush, pull the lever on the rear, right side toward you. Release the lever to close the opening from the toilet to the black tank. Pull the lever halfway to add water to

the toilet bowl. Refer to the Toilet Owners Manual for operation, troubleshooting, cleaning, and parts.

**NOTE:** *It is highly recommended that you use an RV type toilet paper because it breaks down quickly and is easily discharged when the black tank is emptied.*

## Drain Systems / Holding Tank Evacuation

To provide complete self-containment, and to comply with requirements of good sanitation practices, Born Free Motorcoaches are equipped with a dual tank drain system. The sanitary holding tank (black waste tank) on rear bath models receives waste from the toilet and the bathroom lavatory. The black waste tank for all other models receives waste from the toilet only. The second tank (gray water tank) collects wastewater from the sinks and from the shower.

These two tanks share a common outlet (Figure 5.4) (located on the driver's side, at the rear of the motorcoach) and each tank has its own slide valve.

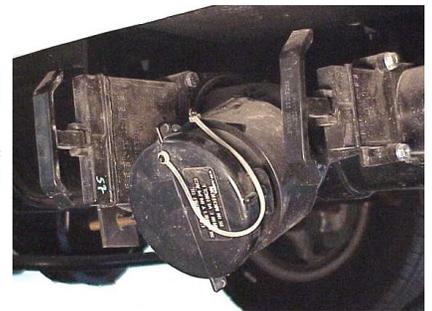


Figure 5.4

The black waste tank should be emptied only at authorized sanitary disposal stations or sewer hookups at a campground. Position the motorcoach at the sanitation station so the sewer connection is located near the drain opening. Remove the cap on the drain opening and install the sewer hose to the connection. Place the open end of the sewer hose in the disposal drain, making certain it stays in position during the entire evacuation process. DO NOT open both valves at the same time – opening each valve separately will eliminate the risk of the contents of either tank running into the other. Each tank should be drained separately. The black waste tank should be emptied first. Pull the slide valve handle all the way out so the contents will run out in a quick, flushing manner. When the black tank is empty, close the valve. Empty the gray water waste tank in the same manner. Each tank should then be rinsed to assure all waste has been removed. If the motorcoach has a black water tank flush system, it

can be used to flush the black water tank. If it does not, the best method of rinsing the tanks is to make certain the slide valves are closed and then partially fill the black tank through the toilet and the gray tank by turning a faucet on in one of the sinks; open the slide valves again to allow the rinse water to empty. When they are again empty, close the slide valves. Disconnect the sewer hose, rinse it, and replace it in its carrier.

When you are parked at a campsite with sewer hookup facilities, connect the drain hose, making sure the connection is tight so septic odor does not come back into the coach. A secure connection to the sewer hookup is highly recommended, and, in some cases, required by the campground. The valves should remain closed until the tanks need to be emptied. The method for emptying the black waste tank and the gray water waste tank is the same as previously described.

## Seasonal Protection –

**NOTE: Do not use automotive-type antifreeze. This ethylene glycol-type antifreeze is poisonous and is not approved for potable water systems.**

### Winterizing

Two gallons of RV antifreeze will be sufficient for this process:

1. For all models, make sure the water pump, water heater and gas are turned off.
2. Relieve pressure in the water lines by opening and then closing a hot and cold faucet.
3. For (6) gallon water heater models, turn the valves on the back of the water heater to the bypass position so water can flow through the system but not into or out of the water heater. All (3) valves should be in a vertical position. Go to the outside of the motorcoach, open the water heater access door, and open the pressure relief valve (Figure 5.5) (C) to relieve pressure in the tank. Remove the anode rod (D) from the tank to drain the water from the

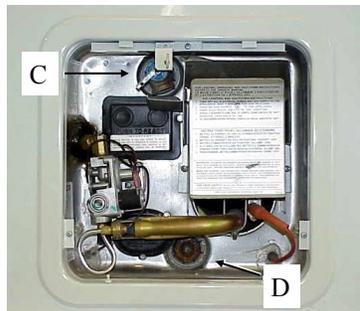


Figure 5.5

heater. When the water heater has been drained, close the pressure relief valve. Leave the anode rod out until the water heater is again needed. Refer to your water heater manual for more information on winterizing.

4. For all models, locate the fresh water tank; follow the white outlet hose to a drain valve that allows water to drain through the floor of the motorcoach. Open the valve to drain the tank.

5. After the fresh water tank has been drained, close the drain valve.

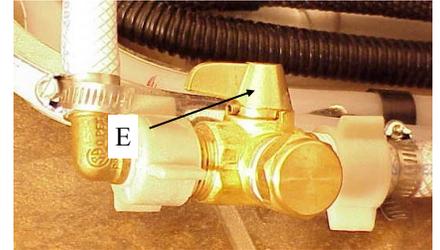


Figure 5.6

Continue to follow the white hose from the drain

valve toward the water pump to a brass 3-way siphon valve (Figure 5.6). Turn the handle (E) so it is perpendicular to the direction of the water line. The 3-way siphon valve will be later used to add RV antifreeze to the lines.

6. Search for other drain valves (Figure 5.7) throughout the motorcoach and open them (F) so water can drain from the lines.



Figure 5.7

These drain valves may be located below the kitchen sink, below the stove, below the vanity, or near the water heater. To assist in the draining process, open all hot and cold faucets to allow air into the system. When draining the lines to the outside shower, press the lever on the shower head while opening the hot and cold faucets.

7. When all of the lines have been drained, close all drain valves and faucets.
8. Locate the brass 3-way siphon valve and remove the protective cap. Replace the cap with one end of the siphon hose and place the other end into a container of RV antifreeze. (Make sure the valve handle is pointed toward the siphon hose.)
9. Turn on the water pump and then individually turn on the bathroom vanity faucet, tub faucet, showerhead, toilet, toilet spray hose, outside

- shower, and kitchen faucet until both hot and cold flow pink with RV antifreeze.
10. Pour RV antifreeze down the sink and shower drains to fill the p-traps.
  11. Turn the water pump off.
  12. Remove the winterizing hose from the brass 3-way siphon valve and replace the protective cap.
  13. Dump the black and gray tanks. Your winterizing should be complete.

Along with protecting the water and drain systems, we advise you to follow these simple suggestions for proper winter storage:

- Remove all bedding and clothing to prevent mildew.
- Remove all goods and clean cupboards.
- Affix newspapers to inside windows with masking tape. This will protect your carpet, curtains, and cushions from ultraviolet damage.
- Clean the refrigerator thoroughly and place an open package of baking soda inside. The refrigerator door should be left open.
- Clean all appliances and stove vents.
- Turn LP tank valve to “off”.
- Turn battery disconnect switch to “off”.

### **Summer De-Winterizing**

1. For all models, fill the fresh water tank with clean water.
2. Turn the valve on the brass 3-way siphon (Figure 5.7) so it is parallel to the flow of the water.
3. Turn the water pump on.
4. Turn on all faucets, the toilet, inside and outside showers both hot and cold. Let them run until they flow clear with water.
5. For (6) gallon water heaters, go to the outside of the motorcoach and open the water heater access door. Insert the anode rod into the water heater and secure it in place. Turn the bypass valves on the rear of the water heater so all of them (3) are in a horizontal position. With the valves turned correctly, the water heater will start to fill with water. Lifting the stem of the pressure valve of the water heater will allow the water to fill faster. When water comes out of the pressure valve, the heater is nearly full. Close the pressure valve. The pump will continue to run in order to complete the filling process.

6. For all models, when all faucets are off and the water lines are pressurized, the water pump should cycle off. Check all pressure connections in the water system; they should all be secure and free of leaks. The de-winterizing process is now complete.

### **Disinfection of Potable Water Systems (RV's)**

As approved by the U.S. Public Health Service — to assure complete disinfection of your potable water system (a new system, one that has not been used for a period of time, one that may have become contaminated, or before a long storage period (such as over the winter)) the following procedures are recommended:

1. Prepare a solution using one gallon of water and ¼ cup household bleach (sodium hypochlorite solution). Pour the chlorine solution into the tank when it is empty. One gallon of solution should be used for every 15 gallons of tank capacity. This procedure will result in a residual chlorine concentration of 50 ppm in the water system.
2. Fill the tank with potable water. Open each faucet, both hot and cold taps, running water until a distinct odor of chlorine can be detected (in the water being discharged).
3. Allow the system to stand for at least four hours when disinfecting with a 50 ppm solution. If a shorter time period is desired, then a 100 ppm chlorine concentration should be permitted to stand in the system for at least one hour. (For a 100 ppm concentration, use ½ cup of household bleach with one gallon of water to prepare the chlorine solution.)
4. Drain and flush with potable water.

## **6.0 Tire Inflation and Vehicle Loading**

Vehicles manufactured by Born Free Motorcoach are carefully designed and built to ensure the actual Gross Vehicle Weight (GVW) and the Gross Axle Weight (GAW) of completed vehicles are lower than the Gross Vehicle Weight Rating (GVWR) and the Gross Axle Weight Rating (GAWR) established by the chassis manufacturer. Since the actual vehicle weights are lower than the maximum vehicle and axle ratings established by the chassis manufacturer, the tire pressure standard used by

Born Free Motorcoach for completed vehicles is also lower than the maximum tire pressures established by the chassis and tire manufacturers. The owner of a vehicle manufactured by Born Free Motorcoach is responsible for determining the optimal tire pressure to be used for their vehicle - dependent upon cargo weight and driving conditions under which they operate the vehicle. Overloading or under-inflating the tires can have negative effects, including rapid tire wear, tire failure, reduced handling capability, and dangerous on-road breakdown. To determine the optimum tire pressure for your motorhome refer to the air pressure stamped on your tires and printed on the Federal Certification Label. Service and warranty on the vehicle tires needs to be handled by the tire store representing the specific brand installed on your motorhome.

### Vehicle Loading Tips

When loading heavy items, balance side to side and front to rear; do not put heavy items all in one compartment. After you have established what you will load into the motorcoach, put your standard load on the coach, fill it up with gas, water, and LP and then get individual wheel weights (or at least front and rear).

### Trailer Towing

Whenever a motorcoach is used for towing, adhere to the limitations listed below:

- The towing hitch (Figure 6.1) on the Born Free is a Class 3 Rated Hitch (500 pounds – tongue weight / 5000 pounds towing weight). Towed vehicles and trailers must not exceed the hitch ratings. The electrical connection for towing is located on the bumper (Figure 6.2).
- The Gross Combined Weight (GCW) must not exceed the Gross Vehicle Weight



Figure 6.1



Figure 6.2

Rating (GVWR).

- Trailers weighing in excess of 1000 pounds require trailer brakes.
- Be aware that most states and Canadian provinces require braking systems on tow vehicles. This requirement is for both trailers and drivable vehicles.

Gross Combined Weight (GCW — tongue weight plus motorcoach weight) equals the total weight of a fully equipped motorcoach and trailer with cargo, driver, passengers, fluids, etc.

Do not restrict radiator airflow by mounting a front-mount spare tire, trail bikes, etc. to the front of the motorcoach.

***C A U T I O N: Installation of a frame-type equalization hitch on a motorcoach is not recommended.***

### Towing & Tips

The OEM chassis for your motorcoach is equipped with brakes for braking the chassis only. It is not intended as a braking system for a towed vehicle. For safe towing operation, it is recommended that all towed vehicles be equipped with a separate functional braking system. You should refer to your chassis owner’s manual and trailer towing guide for additional information and you should always follow guidelines for safe operation. If your towed vehicle is equipped with an automatic transmission, your vehicle dealer or manufacturer should be able to provide you with specific towing requirements.

When you tow a vehicle with all four wheels down, you should consult with your towed vehicle dealer or manufacturer prior to towing. Not all vehicles can be towed in this manner.

It is the responsibility of the motorcoach owner, when they tow another vehicle, to do it in a safe, responsible, and legally approved manner. Born Free Motorcoach can accept no responsibility for the owner’s negligence or disregard for state or federal laws.

When towing . . .

- Make extra wide turns to compensate for the wider turning radius of the trailer or tow vehicle.
- Place wheel blocks (chocks) under the trailer wheels before setting the tow vehicle's brakes and transmission. The blocks will absorb the stress and secure the trailer.
- Frequently check operation of trailer brakes and trailer lights.
- Decrease trailer load substantially for high altitude driving.

## Driving Tips

Your Born Free Motorcoach will drive very much like your "family car." The biggest difference in handling will come from the increased weight, width, height, and length. These differences will become second nature to you after just a few miles. The Born Free Motorcoach may be driven at interstate speeds, just like your car; it will, however, take a bit longer to achieve the maximum driving speed. The motorcoach will slow more when climbing an incline because of the added weight; you should allow yourself more time and room for overtaking and cutting back when maneuvering a pass.

Because the Born Free Motorcoach is wider, than the "family car," consideration should be given when maneuvering through tight places. When maneuvering through a tight place, it is best if you have your co-pilot get out and walk with the motorcoach as it moves. Station the co-pilot at the left rear of the motorcoach where you can observe his/her signals.

As you become more familiar with your Born Free Motorcoach, you will become more aware of its additional weight, length, and width. As you approach low hanging branches or low building canopies, the height of the motorcoach must be a constant thought. For proper clearance, in most cases, eleven (11) feet should be allowed for a motorcoach with a roof-mounted air conditioner.

An experienced traveler "walks his rig" at every stop; it takes but a minute to make a trip all the way around to look at the motorcoach to ensure all caps are in place, access doors are secure, and tires are well inflated. The rear inside duals should be checked either by kicking them or hitting them with

a tire iron. An under inflated tire will move on the rim causing heat to build-up, or, possibly a fire. "Once around before in" is a good policy to follow.

Fuel efficiency of the Born Free Motorcoach depends on several factors: (1) the load it's carrying; (2) the size and weight of the motorcoach body; (3) driving habits and general condition and maintenance of the vehicle; and (4) road, terrain, and wind conditions. Adding a trailer to the motorcoach will place an additional load on its engine and will subsequently reduce the fuel economy.

Some suggestions for increasing fuel economy:

- Refer to the Chassis Owner's Manual for break-in instructions and driving speeds the first 1,000 miles.
- Change the oil and filter according to the manufacturer's recommendations.
- Manually shift the automatic transmission when appropriate.
- Inspect air and fuel filters frequently when encountering excessive dust, bugs and debris.
- Keep cargo to a minimum.
- Make sure tires and air bags are properly inflated.
- Restrict dash air conditioner use when possible.

## Operating Tips – Diesel Owners

The performance of your engine can be greatly affected by what fuel is used. Because of the variety of fuels available today (e.g. low sulfur, ultra low sulfur, blended biodiesel, etc.) it can be confusing to know what fuel will allow your engine to perform at its highest level of efficiency in different conditions. Your choice of fuels in hot or cold weather, for example, will affect engine performance and may impact it negatively or even create unsafe conditions. To better understand the impact of different fuels with your engine refer to the Chassis Owners Manual provided with your motorcoach.

Engine starting procedures and "break-in" instructions are also different for diesel engines. Please refer to the Chassis Owners Manual for more information.

## Routine Maintenance

Born Free Motorcoach suggests the following guidelines be used when operating a Born Free Motorcoach:

- Change engine oil and filter at 3000 mile intervals. Please refer to the Chassis Owners Manual for oil specifications.
- Rotate tires at 5,000-7,500 miles and again at 10,000-15,000 miles.
- Contact a truck alignment shop and have them align the front end at approximately 2500-4000 miles. If the motorcoach pulls to one side, immediate alignment is necessary. Failure to take immediate action can result in severe tire wear and create a very hazardous driving condition.
- Service the auxiliary generator per the manufacturer's guidelines.
- Wash regularly with a mild soap – do not use abrasive cleaners.
- Seal the motorcoach twice each year using a good polymer sealant.
- By nature of construction, RV's have various roof mounted equipment, screws, seams and joints where water may penetrate the roof if a water tight seal is not maintained.

Roof-top sealants are subject to expansion and contraction from temperature changes and outside elements which may cause cracking, which could result in a water leak.

It is the owner's responsibility to have these seams periodically checked and maintained to prevent future water leaks.

- Check the caulking twice each year and replace if needed. A rubberized silicone caulking is recommended.

## Travel Tips

Some traveling tips to keep in mind when you're on the road with your Born Free Motorcoach:

- Remember to "think high and wide" - save the top and sides of your motorcoach.
- Keep an eye on service station attendants. They may accidentally fill your water tanks with gas or vice-versa. They may also fill your motorcoach with the wrong type of fuel.
- Use manned toll gates – you will typically be charged one class more than a car. States may or may not require you to stop at weigh stations.

- Check the oil every time you stop for fuel.
- Check wheel lug nuts before each trip begins.
- Do not leave food or odor-causing materials in your vehicle for extensive periods of time.
- Once a month, inspect your fire extinguisher for proper charge. It's also a good idea if everyone using the motorcoach knows where the fire extinguisher is located and how to use it in case of an emergency.
- Conduct a tour of your vehicle before departure to ensure all compartment doors are closed and locked, cabinet doors are closed, and refrigerator doors are secured.
- First-time motorcoach owners may have a tendency to crowd the centerline of the highway. Check your mirrors frequently to prevent this from happening.
- When fogging appears on the motorcoach's windows, an excessive amount of humidity exists inside the vehicle. In extreme cold conditions, the humidity can turn to frost or ice. To alleviate this excess moisture problem, open a roof vent slightly or open a window. Operating power vents will also help.
- Taste the water before filling your fresh water tank.
- Conserve water when taking a shower by taking "sea showers". Wet down and soap from water saved in lavatory, then use the on/off button on the showerhead. Turn the water on and rinse.
- Dump sewage only at approved dumping stations.
- During peak camping season, phone ahead for a camping spot.
- Sleeping bags save work. They take less space than blankets and are usually warmer.
- Some states will not allow you to pass through highway tunnels with LP gas on board your vehicle. If your route includes a tunnel, check with authorities before venturing out.
- Emergency items you should have in the motorcoach:
  - a. Flashlight
  - b. First Aid Kit
  - c. Emergency Flares
  - d. Tool Box
  - e. Plastic Bucket
  - f. Tow Chain / Rope
  - g. Wheel Blocks (for leveling) / Extra Jacks

- h. Water Hose
- i. 100-150 Foot Electrical Cord – 50 Amp Minimum Rating
- j. Fire Extinguisher
- k. Hydraulic Jack and Lug Wrench

## Pre-Trip Inspection

- Inspect springs, shocks, and steering mechanism.
- Check fluid levels – radiator, brake fluid, and washer fluid.
- Examine tires for wear; test for proper inflation.
- Test auxiliary battery for charge and condition – clean battery posts if necessary.
- Check all running lights, turn signals, and panel lights.
- Test horn.
- Check windshield wiper condition.
- Make certain outside mirrors function properly
- Test operation of generator
- Check dumping equipment (secure, clean, working order)
- Test all coach lights
- Test operation of furnace
- Test operation of air conditioner
  - (1) Check air filters and clean if necessary; make sure cooling unit coils are clean and free from debris.
  - (2) Check condensing unit to make certain it is clean and free of obstructions. Air flow should not be blocked.
- Test operation of refrigerator; look at pilot light to ensure the flame is blue in color.
- Test microwave, range, hood, and stove operations.
- Turn on water pump; check water system for leaks
- Check all faucets (Hot and Cold)
- Test operation of the toilet
- Test operation of the water heater
- Check smoke detector and carbon monoxide detector batteries.

## ATTENTION OWNER

- Proper front-end alignment is critical. Not only will it keep your new Born Free

Motorcoach properly handling as you drive down the road, but it will also help you get the maximum life out of your tires. Your Born Free Motorcoach was aligned at the factory, but without any load. The motorcoach's alignment will change as the vehicle breaks in.

The individual tire pressure you choose for your ride, truck as they soften with use, the load (equipment, accessories, personal belongings, etc.) you add and their location in the vehicle can all have an effect on the alignment.

It is important for you to outfit and prepare your vehicle the way you intend to use it, and then have the front-end alignment checked. Choose a reputable alignment shop with experience in larger vehicles. Born Free Motorcoach is under no obligation to pay for this alignment, because each customer will outfit their vehicle uniquely.

If you need assistance, please call our Customer Support Division at 1-800-247-1835.

- Many times, Born Free Motorcoach owners look for ways to improve the mileage and power performance of their vehicles. One alternative many people consider is dual engine exhaust systems.

We do not recommend you convert your vehicle to dual exhaust. The wires, fuel hoses, generator fuel line, electrical isolator, and optional hydraulic jack pump and reservoir of your coach are positioned so they are shielded, or are far enough away from, the single exhaust system and catalytic converter to withstand the high temperatures of the vehicle engine. Adding dual exhaust could put these components an unsafe distance from the heat radiating from the additional exhaust pipe.

Installing dual exhaust may negatively impact your warranty on many of the components listed above, therefore, we do not recommend that you do this.

Questions should be directed to the Customer

Support Division.

- If your Born Free is equipped with Liquid Spring, do not turn the ignition key to the on position if anyone or anything is under the coach. Turning the ignition key to the on position activates the Liquid Spring system and it may adjust the height of the coach when activated. This could result in injury or damage to anyone or anything under the coach.
- Every Born Free Motorcoach has an onboard water pump system. Unlike the city water coming into your home, you have the ability (in your motorcoach) to shut your system off with a switch.

RV's have numerous plastic fittings and lines, which, when put together, make up the water system. You should never leave your water pump on when the motorcoach is in motion. If a fitting or line should break due to the stress of some poorer roads, you may not hear the pump running above the engine or radio. If a leak should occur, you could experience water damage in your coach. The risk of this happening is slight, but better safe than sorry.

We also recommend turning **off your pump when you leave your vehicle for any length of time**. Small drips can occur, just like in your home plumbing, around faucets and drains. If the pump is left on, the pressurized water system will continue to leak in your absence. When you are in the vehicle you will hear the pump run for a second or two; this is a telltale sign that there is a leak. To avoid problems, periodic inspections of the drain p-traps, faucet connections, and water line connections are recommended.

***Note: Plumbing fittings may loosen or even break under certain road conditions. It is critical you follow these guidelines.***

We strive to use the very best products available in the manufacture of Born Free Motorcoaches. We feel our plumbing system is superior to other brands, but we also want

you, the owner, to be aware of potential problem areas and take the necessary precautions to avoid them.

Please feel free to contact Born Free Motorcoach's Customer Support Division with any questions or concerns.



**Born Free RV**  
**1505 13<sup>th</sup> St. N.**  
**Humboldt, Iowa 50548**  
**515-332-3755**  
**Fax: 515-332-3756**  
**[bornfreerv@bornfreerv.com](mailto:bornfreerv@bornfreerv.com)**  
**[www.bornfreerv.com](http://www.bornfreerv.com)**